

U21

SAMPLA CONVEYOR BELTS DATA SHEET

PVCCON 2F/12 PG26 00/V08 AS

KA2PG2601

TECHNICAL INFORMATION

	IMPERIAL	METRIC	
Max Production Width	118.11in	3000mm	
Total Thickness	0.1in	2.6mm	
Mass	0.62lb/ft ²	3kg/m²	
Tensile force at	68lbf/in	12N/mm	
1% elongation (static)	Internal Method - ref. ISO 21181		
Working Temp.	+14/+158F°	-10/+70C°	
Flexion (A)	1.97in 50mm	A	
Counter Flexion (B)	2.36in 60mm	В	

BEST USED FOR


GENERAL CHARACTERISTICS

2 ply green PVC flexible weft. Antistatic

SPECIAL CHARACTERISTICS



BELT CONSTRUCTION INFORMATION

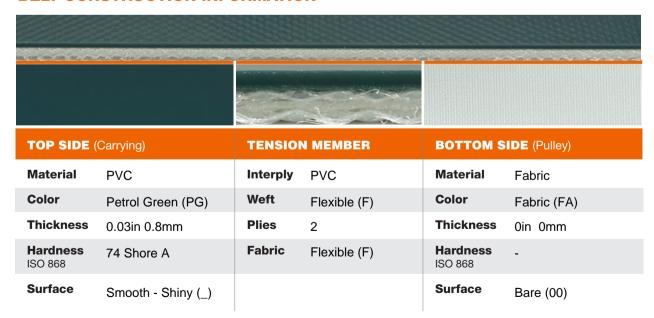




U21

SAMPLA CONVEYOR BELTS DATA SHEET

PVCCON 2F/12 PG26 00/V08 AS

KA2PG2601

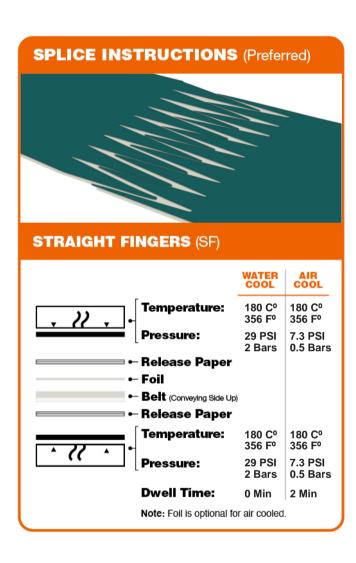


MECHANICAL JOINING METHOD

	Recessed Lacing	YES
	Hidden Lacing	YES
	Staple Lacing	RS62
	Plastic Spiral Lacing	YES
	Spiral Finger	YES
	APF Fasteners	APF-150
THURING.	Alligator	7
	Clipper Lacing 25LP, 30P, UX-1 SP, UCM	36, 36, 1 SP,
	UX-1LL SP	

FRICTION COEFFICIENT (Bottom Side)

Stainless Steel, BA (Brilliant Surface)	0.24
Stainless Steel, 2B (Half-Brilliant Surface)	0.24
Stainless Steel, 2D (Hot-Laminated Surface)	0.28
Rolled Steel Plate	0.24
Plastic Sheet Brilliant Surface)	

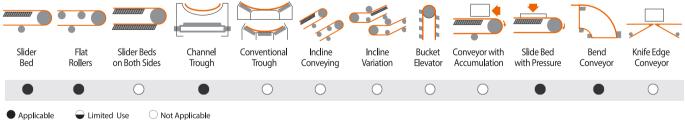

A WARNING: This product can expose you to chemicals including DINP, which is known to the State of California to cause cancer or birth defects or other reproductive harm. For more information visit www.P65WARNINGS.ca.gov

RELEASED 01/01/2019

^{*}Because of continuous development above data is subjected to change without prior notice by Sampla. This data replaces that included in previous publications. Sampla excludes any liability for the incorrect use of the above stated information.